

Technical Specifications

SOLARIS™ SUPER4 Heritage

Freesuns Solar Roof tiles are powerful, beautiful and sustainable. Every Freesuns roof generates carbon-emission-free solar power creating a return on investment for building owners and a stunning roof for their building.

Powerful


Freesuns Solar Roof tiles contain photovoltaic cells that convert sunlight into clean energy. Our solar tiles provide maximum photovoltaic coverage for optimal energy production on all types of roofs.

Beautiful

Freesuns Solar Roof tiles are available in a wide range of colours and finishes, suitable for both modern and traditional architecture. This allows the production of solar energy without compromising the aesthetics of the building.

Flexible

Our small format tiles, pre-cut in different shapes, allow you to accommodate roof obstacles such as windows and chimneys, adapt to complex roof shapes and thus guarantee maximum coverage of photovoltaic cells.

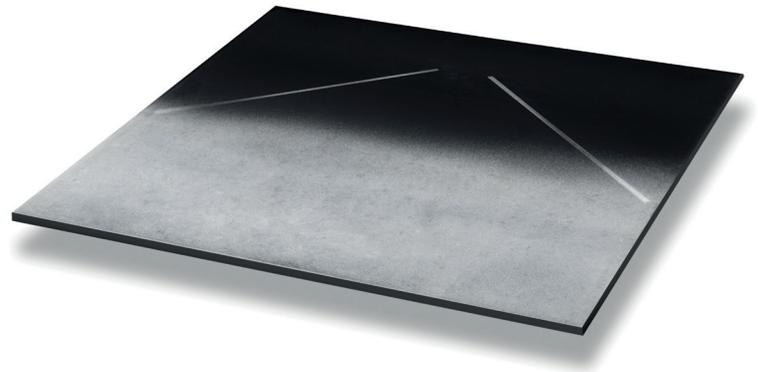

Suitable for new or existing buildings, heritage architecture, replacement of slate style roofs.

Safe

The design of our tiles significantly reduces the risk of fire thanks to a diode present in each tile, a high thermal mass, and monitoring by power optimizers.

Easy to install

The tiles are installed by traditional roofers on existing roof structures with existing fixtures.

Return on Investment

By generating a portion of your energy needs for free, the Freesuns Solar Roof has a positive return on investment and will pay for itself over its lifetime - unlike a traditional roof.

Detailed Engineering

With its state-of-the-art software, Freesuns provides a detailed layout of each roof, showing how to install each tile with precision.

Designed in Switzerland

Freesuns Solar Roof tiles are designed and developed in Switzerland.



SOLARIS™ SUPER4 Heritage

Physical specifications


Dimension of the tile (L x H mm)	—	700 x 460 mm
Surface of the visible area (L x H mm)	—	700 x 175 mm
Thickness of the tile	—	7 mm
Number of cells per tile	—	4
Number of tiles per m ²	—	8.05
Power per m²	—	138.2 Wp
Unit weight	—	5.8 kg
Weight per m²	—	46.69 kg
Cell Type	—	Monocrystallin PERC 5BB 158.75 x 158.75 mm
Connector type	—	MC4 type IP65
Material	—	Tempered Solar Glass
Structure	—	Glass/glass
Hail resistance	—	HW5 (ø 50 mm at 30.8 m/s)
Max. test load (positive pressure)	—	5400 Pa (heavy snow load)

Electrical specifications

Power per tile (P _{mpp})	—	17.17 Wp
MPP Voltage	—	2.10 V
MPP Current (I _{mpp})	—	8.17 A
Open Circuit Voltage Voc	—	2.69 V
Short Circuit Current I _{sc}	—	8.57 A
Module efficiency	—	13.82 %
Power Tolerance	—	+/- 5 %
Max. system voltage	—	TBC
Max. reverse current	—	TBC
Temperature coefficient Voc*	—	-0.36 %/K
Temperature coefficient I _{sc} *	—	+0.07 %/K
Temperature coefficient P_{mpp}*	—	-0.38 %/K

* Measured coefficients for the cells.

Electrical performance characteristics under STC conditions (1000 W/m², 25° C, AM 1.5).

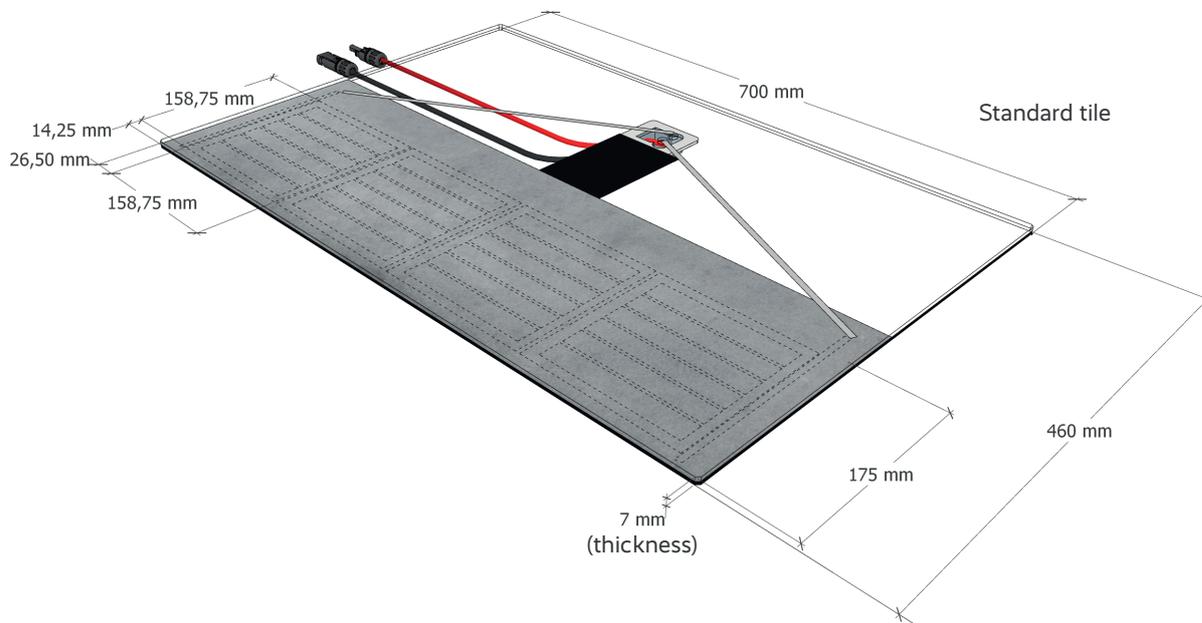

Each project includes tiles of different sizes.

Appearance

Matt grey with no visible lines
Anti-reflection coating (AR)

Compatibility

Solaris™ SUPER4 Heritage solar roof tiles are compatible with standard roof tiles such as Eternit Vulcanit N 6505.

Warranty

10 years on the tiles
Minimum power guarantee:
90% after 10 years

Contact

FRESUNS SA
info@freesuns.ch
+41 79 693 66 20
www.freesuns.ch

Chemin de la Séverire 6
CH-1114 Colombier-sur-Morges (VD)