



## TECHNICAL SPECIFICATIONS

SOLARIS™

VDIAMOND TERRACOTTA-M1/A1

**Freesuns Solar Roof tiles are powerful, beautiful and sustainable.**

Every Freesuns roof generates carbon-emission-free solar power creating a return on investment for building owners and a stunning roof for their building.

### Powerful

Freesuns Solar Roof tiles contain photovoltaic cells that convert sunlight into clean energy. Our solar tiles provide maximum photovoltaic coverage for optimal energy production on all types of roofs.

### Beautiful

Freesuns Solar Roof tiles are available in a wide range of colours and finishes, suitable for both modern and traditional architecture. This allows the production of solar energy without compromising the aesthetics of the building.

### Flexible

Our small format tiles, pre-cut in different shapes, allow you to accommodate roof obstacles such as windows and chimneys, adapt to complex roof shapes and thus guarantee maximum coverage of photovoltaic cells.

### Safe

The design of our tiles significantly reduces the risk of fire thanks to a diode present in each tile, a high thermal mass, and monitoring by power optimizers.

### Return on Investment

By generating a portion of your energy needs for free, the Freesuns Solar Roof has a positive return on investment and will pay for itself over its lifetime - unlike a traditional roof.

### Designed in Switzerland

Freesuns Solar Roof tiles are designed and developed in Switzerland.

**Freesuns SA** | Chemin de la Séverine 6 | CH-1114 Colombier-sur-Morges (VD)  
info@freesuns.ch | +41 79 693 66 20 | www.freesuns.ch



**Suitable for new buildings or the renovation of listed roofs.**



### Easy to install

The tiles are installed by traditional roofers on existing roof structures with existing fixtures.

### Detailed Engineering

With its state-of-the-art software, Freesuns provides a detailed layout of each roof, showing how to install each tile with precision.

**Freesuns**  
SOLAR  ROOFS



## TECHNICAL SPECIFICATIONS

SOLARIS™

### VDIAMOND TERRACOTTA-M1/A1

#### Physical specifications

Dimension of the tile (L x H mm)	– 730 x 400 mm
Surface of the visible area (L x H mm)	– 730 x 140 mm
Thickness of the tile	– 7 mm
Number of half cells per tile	– 3
Number of tiles per m <sup>2</sup>	– 9,65
Power per m <sup>2</sup>	– 96,9 Wp (M1) / 89,6 Wp (A1)
Unit weight	– 4,20 kg
Weight per m <sup>2</sup>	– 40,53 kg
Cell Type	– Monocrystallin PERC 5BB 156,75 x 156,75 mm
Connector type	– MC4 (IP65)
Type of glass	– Anti-reflective solar glass front/back
Hail resistance	– HW3
Max. test load	– 5400 Pa
(Incl. safety factor of 1.5)	

#### Electrical specifications

	M1	A1
Bypass diode per tile	– 1	1
Power per tile (Pmpp)	– 10,04 Wp	9,28 Wp
Voltage (Umpp)	– 1,62 V	1,59 V
(Impp)	– 6,20 A	5,84 A
Open Circuit Voltage (Voc)	– 2,02 V	2,01 V
Short Circuit Current (Isc)	– 6,77 A	6,19 A
Tile efficiency	– 9,69 %	9,08 %
Electrical measures	–	+/- 5%
Max. system voltage*	–	125 VDC
Max. reverse current	–	20 A
Temperature coefficient (Voc)*	–	-0.36%/K
Temperature coefficient (Isc)*	–	+0,06 %/K
Temperature coefficient (Pmpp)*	–	-0,36 %/K

\*Measured coefficients for the cells. Electrical performance characteristics under STC conditions (1000 W/m<sup>2</sup>, 25° C, AM 1.5).


#### Appearance

- Earth tone color - terracotta, brown, red
- Anti-reflection coating (AR)


#### Warranty

- 10 years on the tiles
- Minimum power guarantee: 90% after 10 years
- Waether resistance guarantee: 40 years

M1

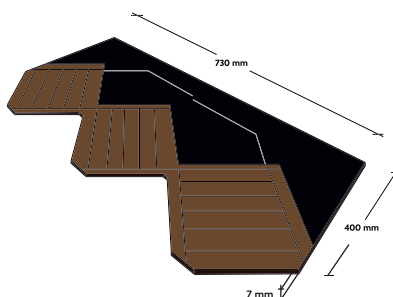

A1

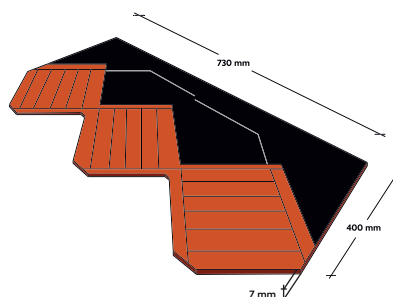

Data subject to change